
Anodized Aluminum

KALLOS PROCENEFA (KSKD) is an ALUMINUM Skirting. It is ideal for use where a modern, hi-tech finish is required. It can be used with most types of floor covering including carpets, resilient flooring, stone, wood, wood laminate and ceramic tiles. The profile is designed to sit on top of the floor covering in order to provide a neat finish. Available in Matt Silver, and with matching finishing trims for neat installation: End caps, junctions and internal/external corners.

KALLOS Aluminum profiles Supplied with protection film for added protection, before, during and after application - as standard.

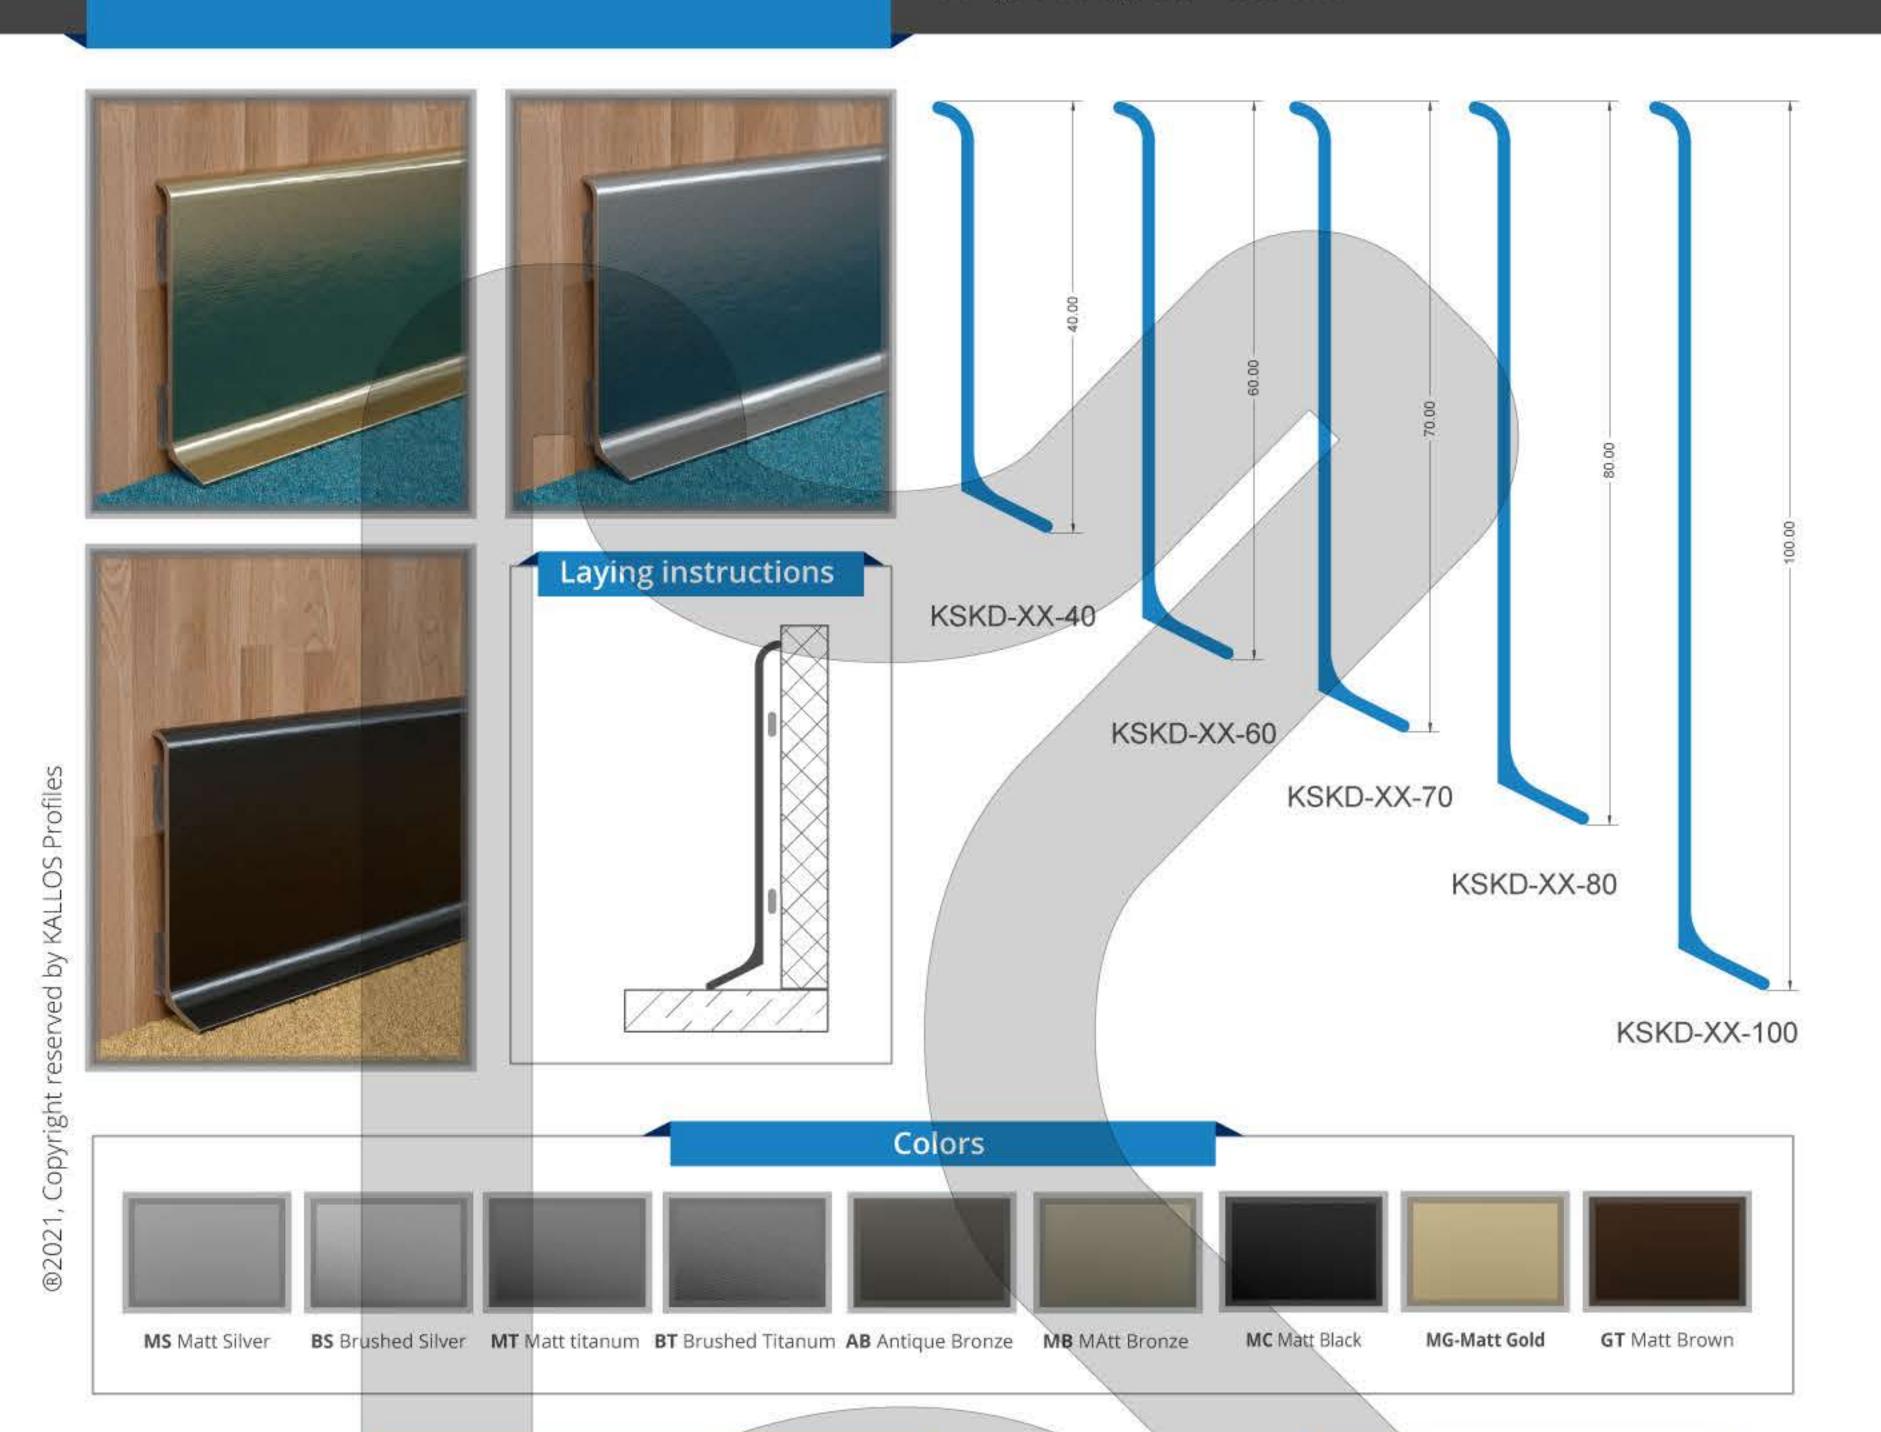

General Cleaning and Maintenance

- » Kallos KSKD does not require any special maintenance. Oxidation films on Aluminium may be removed with a common polishing agent; however, they do reoccur. Damaged anodised finishes may only be repaired by recoating.
- » Aluminium must be tested to verify its suitability if chemical stresses are anticipated.
- » Cementitious materials, in conjunction with moisture, become alkaline. Since aluminium is sensitive to alkaline substances, exposure to the alkali (depending on the concentration and time of exposure) may result in corrosion (aluminium hydroxide formation). Therefore, it is important to remove adhesive or grout residue from visible surfaces. In addition, ensure that the profile is solidly embedded in the setting material and that all cavities are filled to prevent the collection of alkaline water.
- » The anodised layer creates a finish that retains a uniform appearance during normal use. The surface, however, is susceptible to scratching and wear and may be damaged by tile adhesive, mortar, or grouting material.
- » Therefore, setting materials must be removed immediately. Otherwise, the description regarding aluminium applies

Anodized Aluminum

Alloy 6063 T6 - bar length 2.50 meter, H (40 to 100) Size can be customized *

ARTICLE	H(mm)	L(m)
KSKD-XX-40	40	2.50
KSKD-XX-60	60	2.50
KSKD-XX-70	70	2.50
KSKD-XX-80	80	2.50
KSKD-XX-100	100	2.50



^{*} Size can be customized, Production upon request, timing and price to be agreed.